


# DAY USE LOCKER CONFIGURATIONS

Spacesaver Day Use Lockers come in a full range of standard sizes to perfectly suit your space, giving you the perfect storage solution for any application.

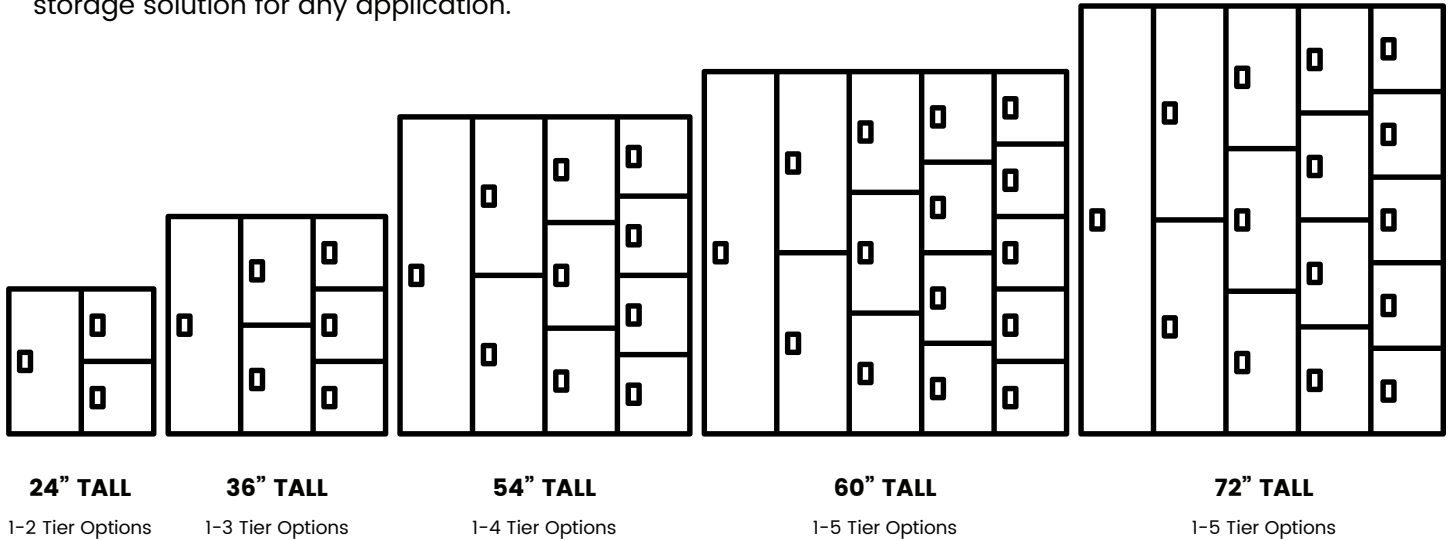

LOCKER HEIGHT	OPENING HEIGHT	OPENING WIDTH	OPENING DEPTH
24"	12", 24"	12", 15", 18"	12", 15", 18", 24"
36"	12", 18", 36"	12", 15", 18"	12", 15", 18", 24"
54"	13.5", 18", 27", 54"	12", 15", 18"	12", 15", 18", 24"
60"	12", 15", 20", 30", 60"	12", 15", 18"	12", 15", 18", 24"
72"	14.4", 18", 24", 36", 72"	12", 15", 18"	12", 15", 18", 24"

Day Use Locker frames<sup>1</sup> are built to your needs from the start. Our lockers are available in a full range of dimensions: with standard heights at 24, 36, 54, 60, and 72 inches, depths at 12, 15, 18, and 24 inches, and widths at 12, 15, and 18 inches.

<sup>1</sup>Additional sizes available in 1" increments upon request

## STANDARD LOCKING OPTIONS



### DIGILOCK KEYPAD

Lock operates using a alphanumeric keypad or key slot via ADA compliant user key.



### ZEPHYR KEYPAD

Lock operates using a numeric keypad, programmable for both day use or permanent use.



### DIGILOCK MECHANICAL

Lock operates using a combination locking system, with a code chosen by each user, resetting after use.



### HASP LOCK

Allows use of any lock to secure locker contents while in use, or remain accessible when vacated.



### KEYED LOCK

Lock operates through individual key use, with available master key for entire locker bank.

<sup>1</sup>Additional locking options available upon request

# STANDARD FEATURES

Engineered with the end user in mind, our lockers come standard with the features you need to increase productivity and security in your spaces.



## STEEL DOOR<sup>2</sup>

Full overlay door available in a steel double-wall finish. Available in a broad range of standard and custom powder coat finishes.



## LAMINATE DOOR<sup>3</sup>

Full overlay door available in HPL finishes. Available in any Wilsonart HPL offering with matching 3mm PVC edge banding options.



## HIDDEN HINGES

Hidden stainless steel slam-proof hinges with adjustable closing rate.



## LEVELING BASE<sup>4</sup>

4" high recessed or flush base with levelers for simple leveling adjustment.

# OPTIONAL ACCESSORIES

Our most popular add-ons to the Spacesaver Day Use Lockers lineup:



## SLOPED TOPS

Prevent dust accumulation and clutter from storing items on top of lockers.



## NUMBER TAGS

Adhesive plastic tags are a great option to identify individual locker locations.



## REAR VENT

Ventilation incorporated in the back of each locker to allow circulation of air.



## INTERIOR HOOK

Integrated hook available to hang personal belongings inside the locker.

# TECHNICAL DETAILS

## <sup>1</sup> LOCKER FRAME

The day use locker frame is constructed of 18 gauge (.048") steel top, bottom and sides joined using resistance welding. The locker frame can be divided into multiple tiers through the use of a fixed position shelf or shelves. Shelves are mechanically fastened to the locker interior using a locking lance feature. Locker can be single, double, or triple column to increase the number of openings in a frame.

## <sup>2</sup> STEEL DOORS

The steel locker doors are formed from two pieces of 20 gauge steel, box formed and riveted together. Doors are full overlay style and 3/8" thick. Doors use one-piece wraparound hinge, constructed of steel and nickel-plated to open 110 degrees. The number of hinges used is dependent on the door height - 12" to 27" high doors use two hinges, 28"-55" high doors use three hinges, and doors 56" - 72" use four hinges. Available in a broad range of standard and custom powder coat finishes.

## <sup>3</sup> HPL LAMINATE DOORS

The High Pressure Laminate (HPL) doors are 3/4" thick MDF with Wilsonart selected design on both face and 3mm color-matched PVC edge banding. Doors are full overlay style. Doors use one-piece wraparound hinge, constructed of steel and nickel-plated to open 110 degrees. The number of hinges used is dependent on the door height - 12" to 27" high doors use two hinges, 28"-55" high doors use three hinges, and doors 56" - 72" use four hinges.

## <sup>4</sup> LEVELING BASE

The bases are constructed of 18 gauge (.048") steel. Base includes threaded appliance levelers in all 4 corners. Bases are 4" tall and can be flush to the frame or recessed 1" from the frame to create a toe kick.